




Quality video over ordinary telephone wire...®

Hub to Hub Configuration

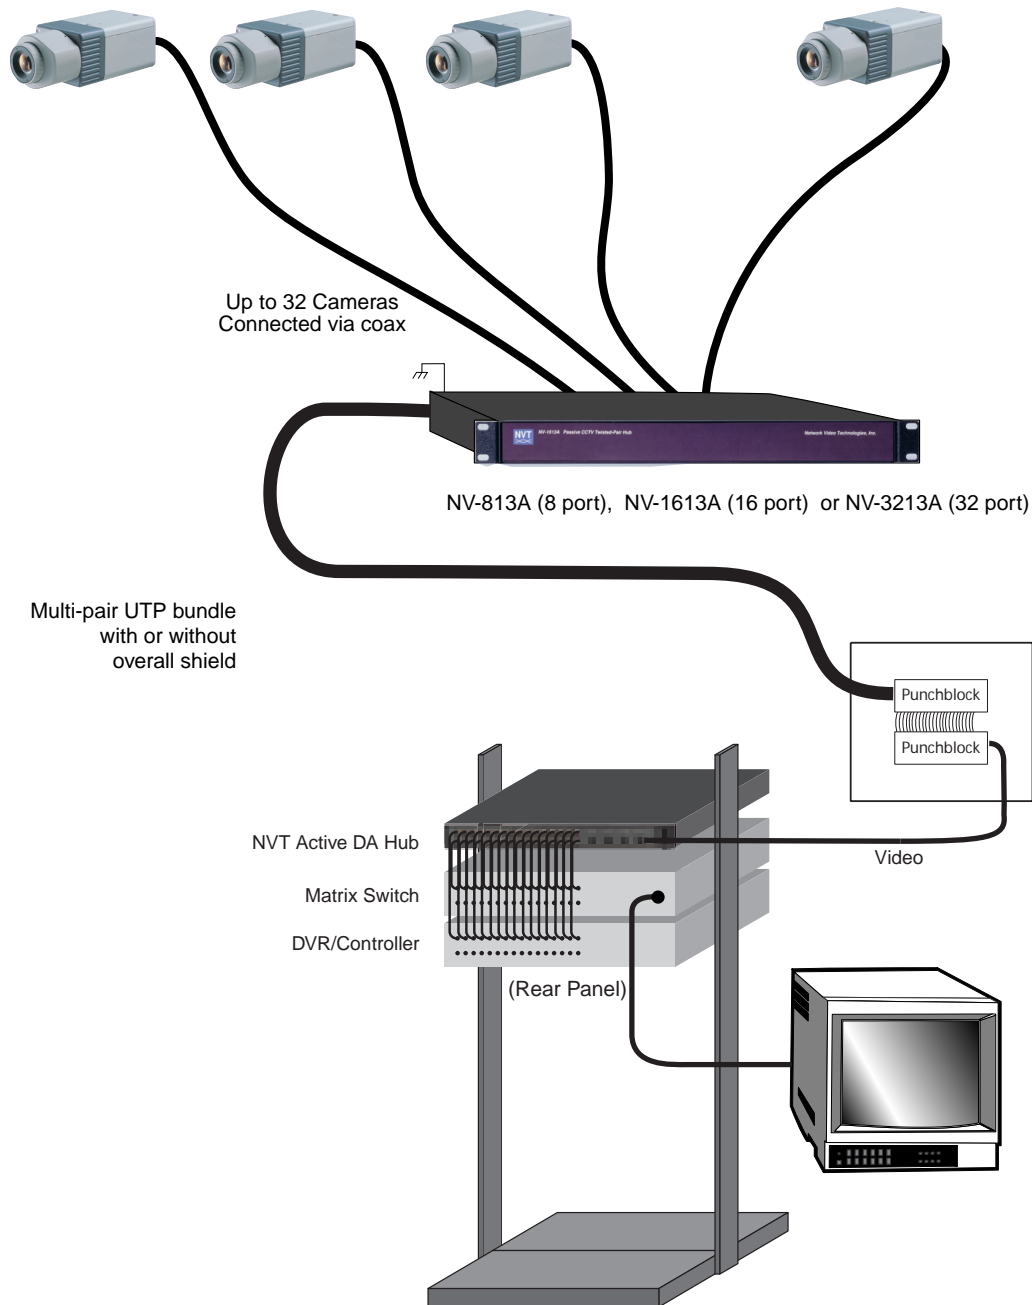

* For digital recording applications it is recommended that Passive to Passive transmission distances be limited to no more than 750 ft. For distances greater than 750 ft please use an NVT Active Receiver product.

Network Video Technologies
 4005 Bohannon Drive • Menlo Park, CA • 94025 • USA
 (+1) 650.462.8100 • 800.959.9870 • FAX (+1) 650.326.1940
 www.nvt.com • info@nvt.com

Copyright © 2003 NVT, Inc.

419-406-1-E