


Quality video over ordinary telephone wire...®

"Up-the-coax" type P/T/Z controls

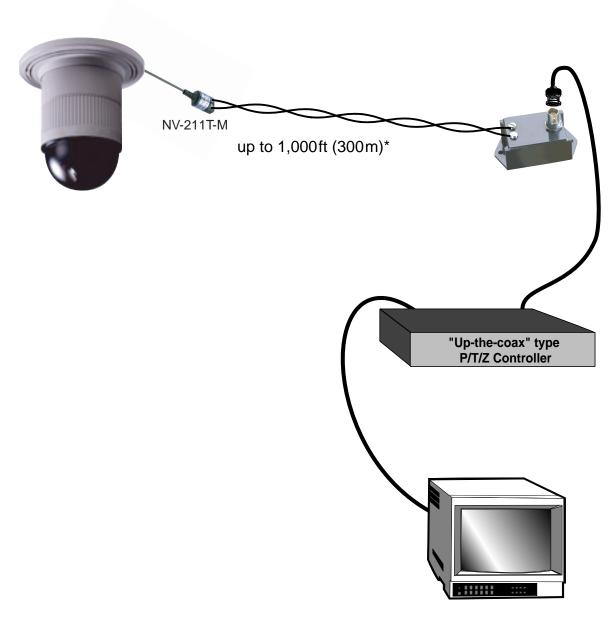

* For digital recording applications it is recommended that Passive to Passive transmission distances be limited to no more than 750 ft. For distances greater than 750 ft please use an NVT Active Receiver product.